
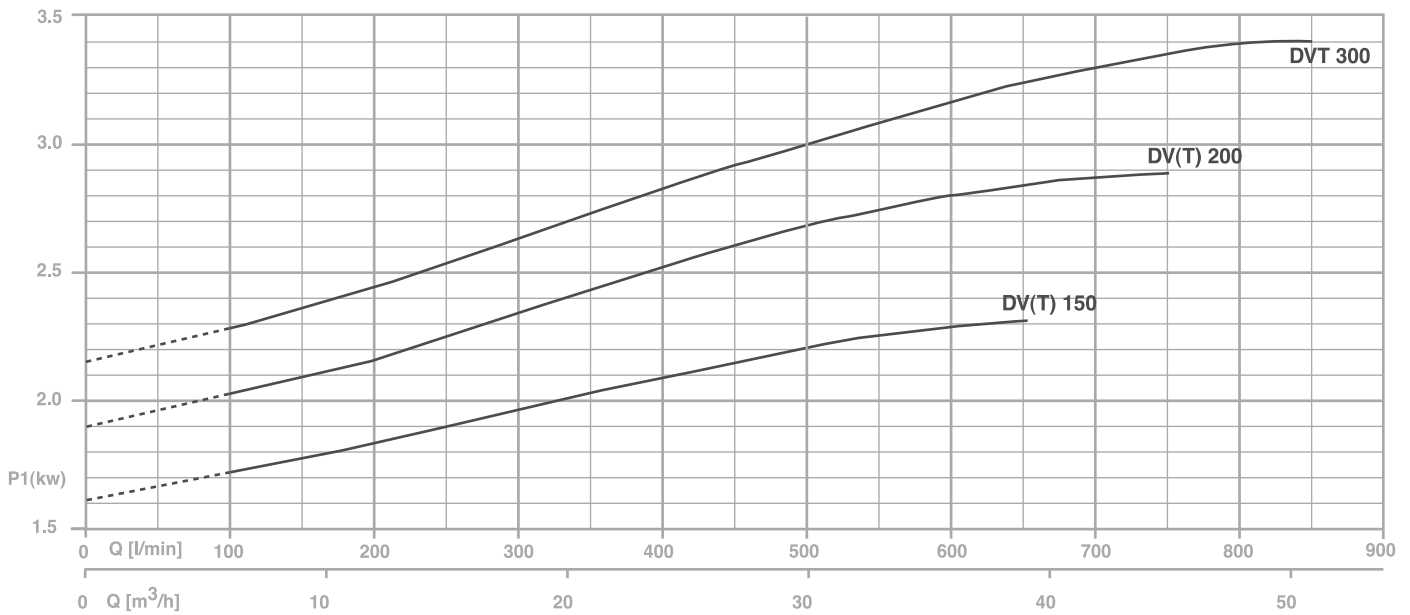


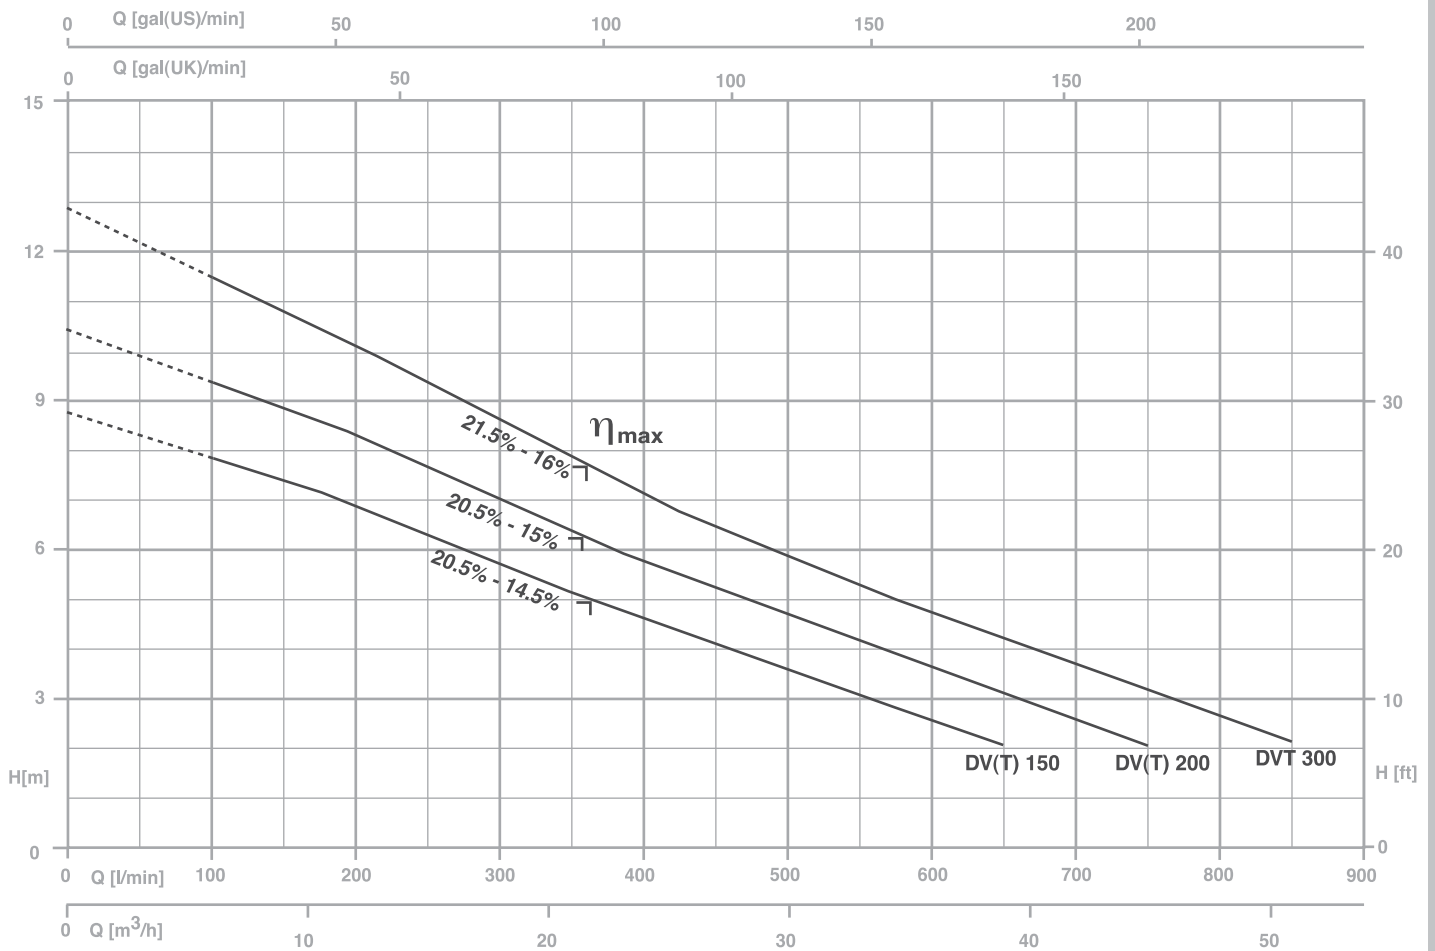



TYPE		AMPERE				
1~	3~	230 V 50 Hz	3x230 V 50 Hz (*)	3x400 V 50 Hz	230/400 V 50 Hz λ / Δ (*)	400/690 V 50 Hz λ / Δ
DV 150	DVT 150	11,8	7,2	4,1	-	-
DV 200	DVT 200	15,2	9,7	5,6	-	-
-	DVT 300	-	10,4	6,0	-	-

η_{max}

max rendimento idraulico e rispettivo rendimento totale
 max hydraulic efficiency and respective total efficiency
 máx rendimiento hidráulico y correspondiente rendimiento total
 max rendement hydraulique et rendement total

(*) no standard execution

TYPE		P2		P1 (kW)		Q (m³/h - l/min)								
1~	3~					0	6	12	18	24	30	39	45	51
						0	100	200	300	400	500	650	750	850
						H (m)								
		(HP)	(kW)	1~	3~									
DV 150	DVT 150	1,5	1,1	2,6	2,3	8,7	7,8	6,8	5,6	4,6	3,6	2	-	-
DV 200	DVT 200	2	1,5	3,4	3,1	10,4	9,4	8,3	7	5,7	4,6	3,1	2	-
-	DVT 300	3	2,2	-	3,4	12,7	11,5	10	8,6	7	5,9	4,4	3,1	2

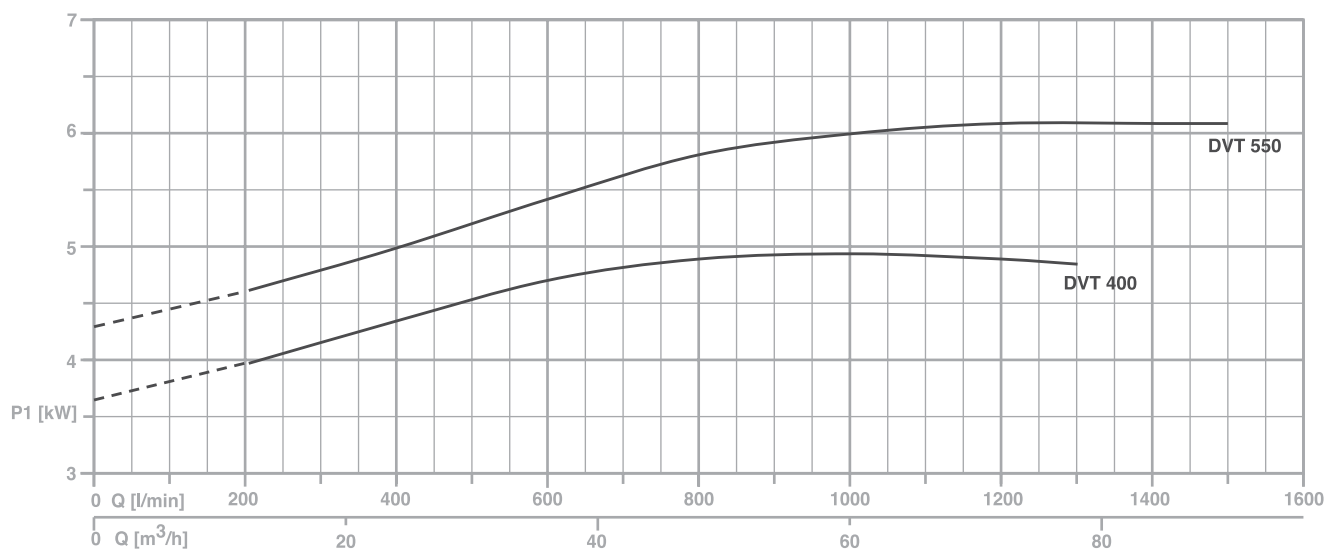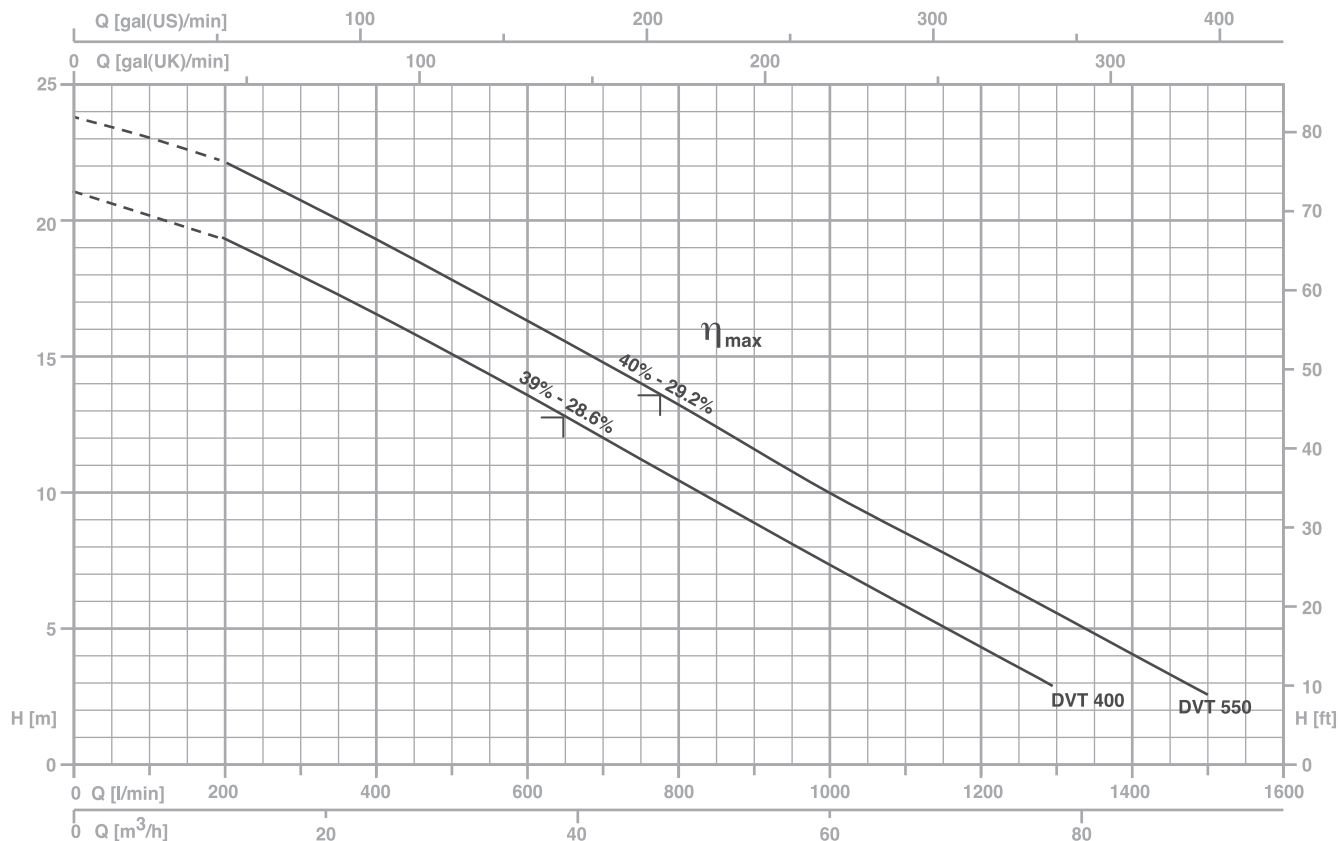



TYPE	AMPERE			
3~	3x230 V 50 Hz (*)	3x400 V 50 Hz	230/400 V 50 Hz λ / Δ (*)	400/690 V 50 Hz λ / Δ
DVT 400	14,1	8,1	-	-
DVT 550	18,1	10,4	-	-

(*) no standard execution

η_{max}

max rendimento idraulico e rispettivo rendimento totale
max hydraulic efficiency and respective total efficiency
máx rendimiento hidráulico y correspondiente rendimiento total
max rendement hydraulique et rendement total

TYPE	P2		P1 (kW)	Q (m³/h - l/min)								
3~				0	12	24	36	48	60	72	78	90
				0	200	400	600	800	1000	1200	1300	1500
				H (m)								
	(HP)	(kW)	3~									
DVT 400	4	3	4,9	21,0	19,4	16,6	13,5	10,4	7,2	4,3	2,8	-
DVT 550	5,5	4	6,1	23,9	22,2	19,3	16,3	13,2	10,0	7,1	5,6	2,6

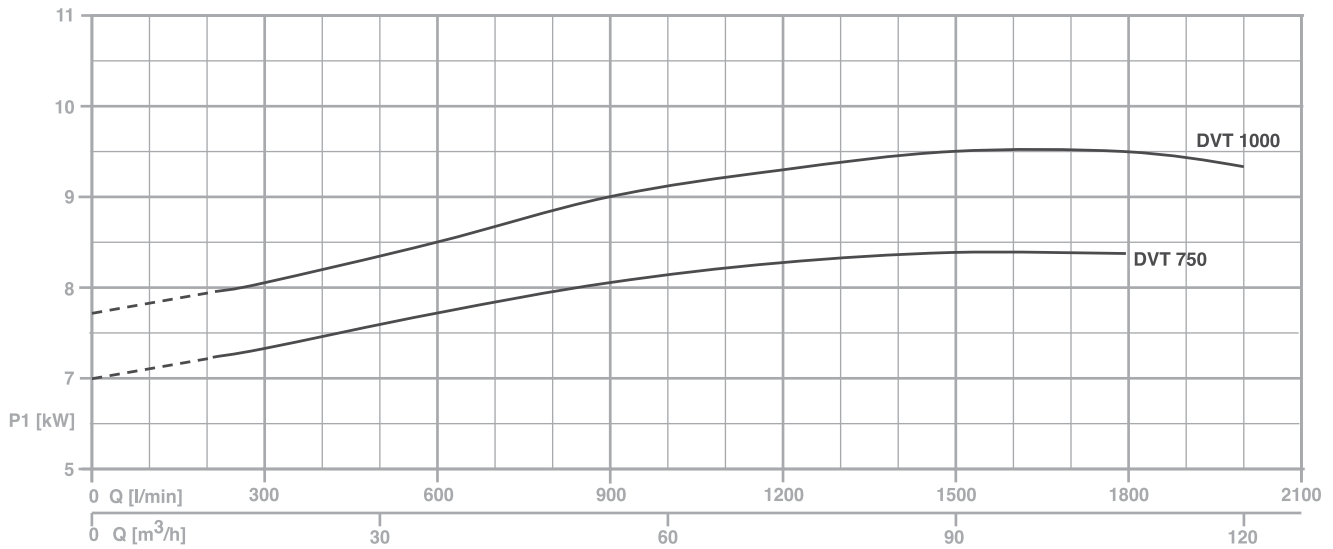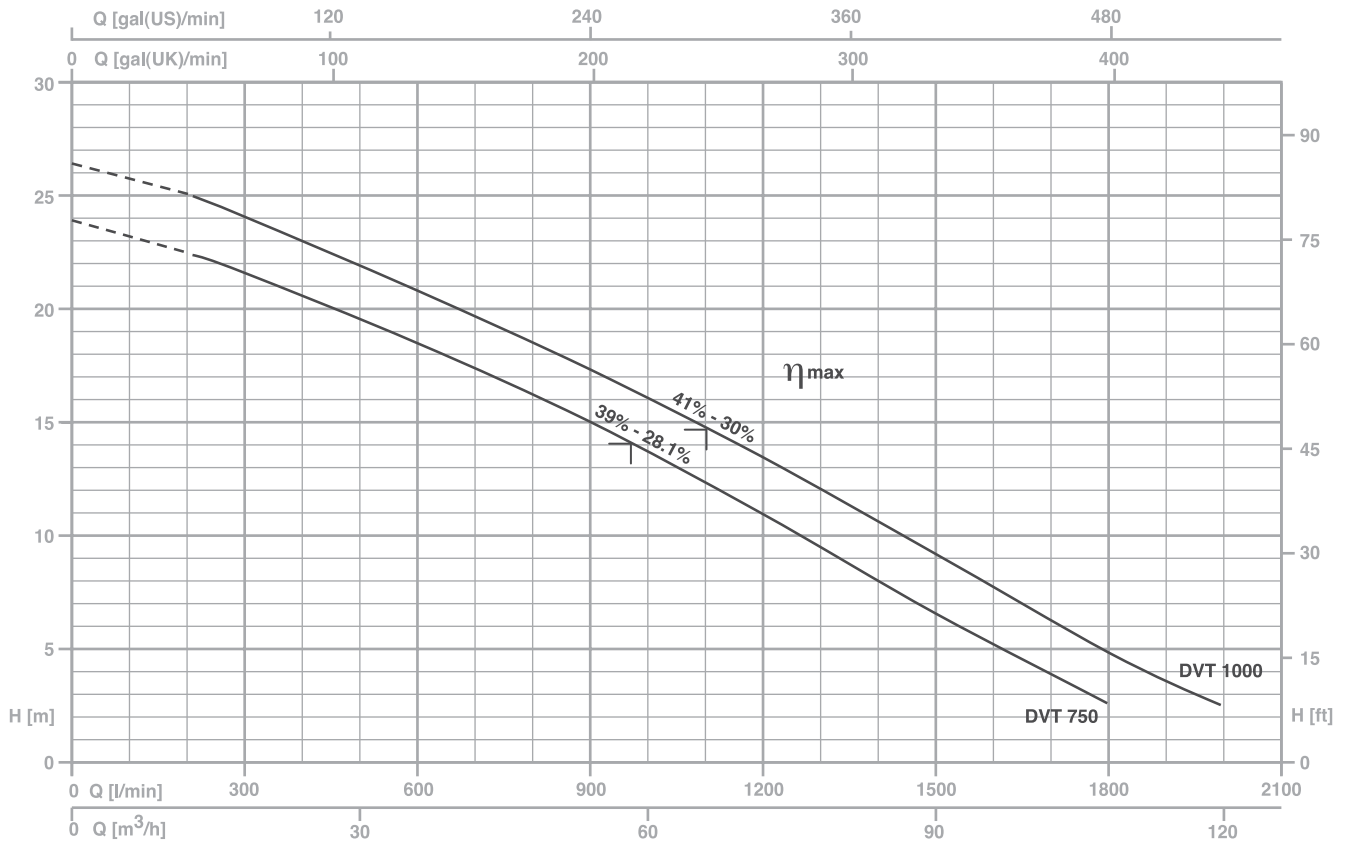

TYPE	AMPERE			
3~	3x230 V 50 Hz (*)	3x400 V 50 Hz	230/400 V 50 Hz Δ / Δ (*)	400/690 V 50 Hz Δ / Δ
DVT 750	-	14,4	25,0	14,4
DVT 1000	-	16,4	28,5	16,4


(*) no standard execution

η_{max}

max rendimento idraulico e rispettivo rendimento totale
max hydraulic efficiency and respective total efficiency
máx rendimiento hidráulico y correspondiente rendimiento total
max rendement hydraulique et rendement total

TYPE	P2		P1 (kW)	Q (m³/h - l/min)											
3~				0	12	24	36	48	60	72	84	96	108	114	120
	(HP)	(kW)	3~	0	200	400	600	800	1000	1200	1400	1600	1800	1900	2000
	H (m)														
DVT 750	7,5	5,5	8,5	24,2	22,7	20,7	18,7	16,4	13,9	11,1	8,2	5,4	2,8	-	-
DVT 1000	10	7,5	9,6	26,7	25,2	23,2	21,2	18,8	16,3	13,7	10,8	8,0	5,1	3,8	2,6



ACCESSORIES

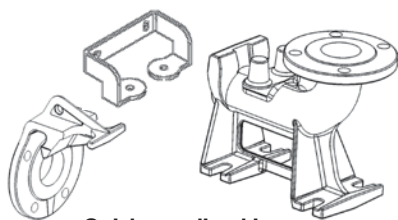

Quick coupling kit





Counterflange

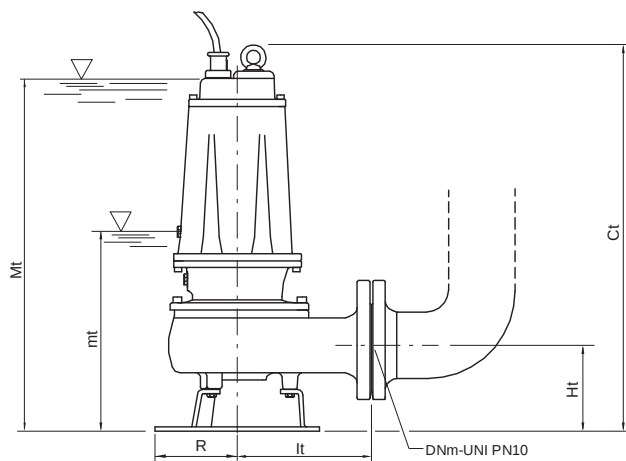

Mt/Mf: livello minimo di funzionamento continuo
 Mt/Mf: lowest level for continuous duty
 Mt/Mf: nivel mínimo de funcionamiento continuo
 Mt/Mf: niveau minimum de fonctionnement continuu

mt/mf: livello minimo di funzionamento
 mt/mf: lowest working level
 mt/mf: nivel mínimo de funcionamiento
 mt/mf: niveau minimum de fonctionnement

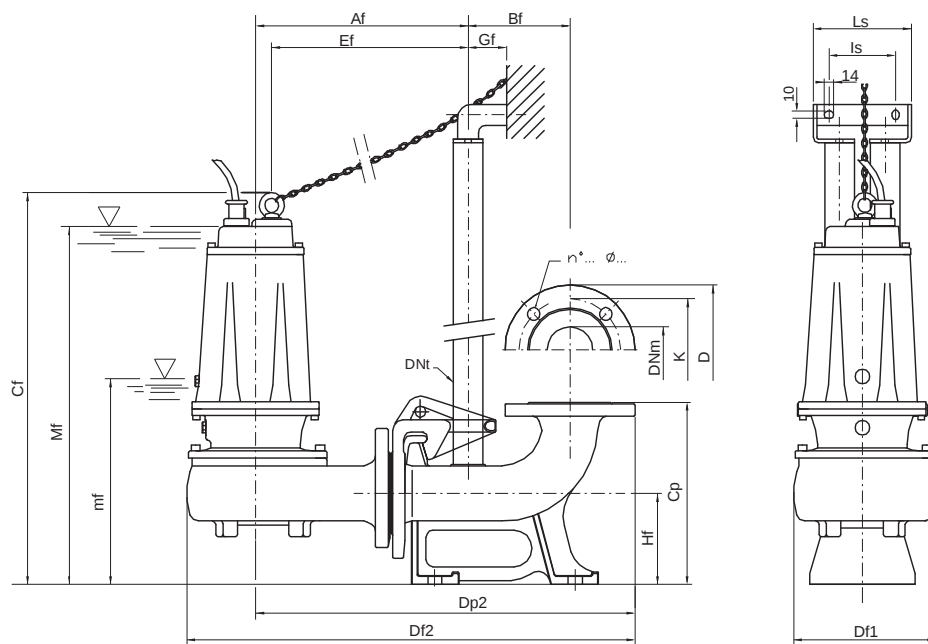

Flange UNI PN 10 (mm)

DNm	K	D	n°... Ø...
65	145	185	4... 18...
80	160	200	8... 18...

TYPE	DIMENSIONS (mm)							
	Ct	Ht	R	lt	mt	Mt	DNm	
DVT 150	551	123	117	191	243	513	65	39
DV 150-DVT 200	551	123	117	191	243	513	65	40
DV 200-DVT 300	551	123	117	191	243	513	65	41
DVT 400	645	148	160	210	285	600	80	58
DVT 550	645	148	160	210	285	600	80	66
DVT 750	725	178	180	232	358	670	80	87
DVT 1000	725	178	180	232	358	670	80	91

TYPE	DIMENSIONS (mm)																	
	Af	Bf	Cf	Cp	Df1	Df2	Dp2	DNt	Ef	Gf	Hf	l1	l2	ls	Ls	mf	Mf	DNm
DVT 150 /P	303	145	559	260	200	639	541	1" 1/4	280	55	130	200	100	95	140	251	521	65
DV 150-DVT 200/P	303	145	559	260	200	639	541	1" 1/4	280	55	130	200	100	95	140	251	521	65
DV 200-DVT 300/P	303	145	559	260	200	639	541	1" 1/4	280	55	130	200	100	95	140	251	521	65
DVT 400/P	350	165	690	340	220	720	615	2"	319	85	190	250	140	130	180	327	642	80
DVT 550/P	350	165	690	340	220	720	615	2"	319	85	190	250	140	130	180	327	642	80
DVT 750/P	370	165	745	340	235	750	638	2"	338	85	190	250	140	130	180	380	690	80
DVT 1000/P	370	165	745	340	235	750	638	2"	338	85	190	250	140	130	180	380	690	80